

Cooking Systems
& Induction Hobs
2025 — EN

Cooking

From hoods to cooking systems,
Falmec technology
and design create an ideal kitchen
environment, in every sense. A place
where you can breathe
an innovative atmosphere
and savour the pleasure of living.

falmec

Index

03 *Falmec expertise*

08 Level One

18 Brera / Brera 75

34 Zero / Zero Easy

50 Quantum Pro / Quantum Pro Easy

64 Induction hobs / Dialogue System

78 Glossary of functions

80 Carbon.Zeo Microtech

82 Filters / Accessories

84 Installation

85 Ducting accessories




Falmec expertise

Falmec integrated solutions represent more than 40 years of experience in the kitchen extraction industry. The Italian brand's solid design and construction know-how interpret technologies and needs of the cooking world, creating products of significant engineering value, designed to guarantee a healthy and comfortable home environment.



Excellent performances
Cutting-edge cooking technologies, designed to last over time thanks to the use of the best components. Products in harmony with contemporary trends and lifestyles, designed to guarantee the highest performance with extreme silence.

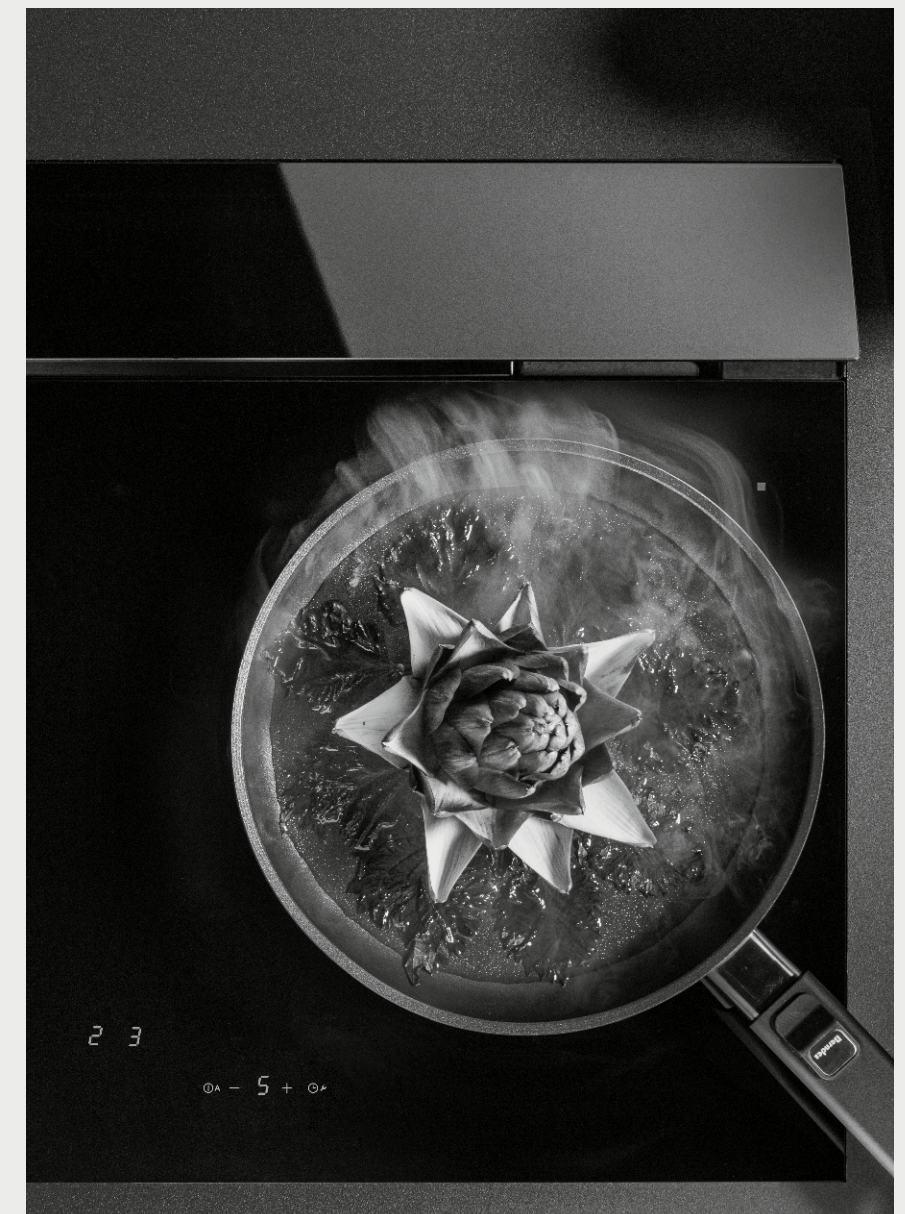

Functional design


Inspired by the idea of essentiality, ergonomics and elegance, Falmec has conceived and manufactured new solutions that integrate cooking and suction. A rational and skilful design in which aesthetics and functionality achieve a perfect balance and where every detail counts.



Pure air

The unique Carbon.Zeo filter uses materials of natural origin, such as carbon and zeolite, to absorb cooking odours and water vapour most effectively, ensuring a healthy and comfortable home environment.

Cooking systems overview

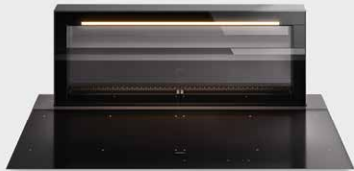

Level One

Induction hob with integrated suction
Extraction / filtering mode
90x52
4 cooking zones
Double bridge function

p. 08, 16



Brera

Induction hob with integrated suction
Extraction / filtering mode
90x52
4 cooking zones
Double bridge function

p. 18, 28



Brera 75

Induction hob with integrated suction
Extraction / filtering mode
75x52
3 cooking zones
Bridge function

p. 18, 32



Zero

Induction hob with integrated suction
Extraction / filtering mode
84x52
4 cooking zones
Bridge function

p. 34, 44



Zero Easy

Induction hob with integrated suction
Filtering mode
84x52
4 cooking zones
Bridge function

p. 34, 48



Quantum Pro

Induction hob with integrated suction
Extraction / filtering mode
84x52
4 cooking zones
Double bridge function

p. 50, 60



Quantum Pro Easy


Induction hob with integrated suction
Filtering mode
84x52
4 cooking zones
Double bridge function

p. 50, 62

Induction hobs overview




Induction 58

Induction hob
58x51
Dialogue system 
4 cooking zones
Bridge function

p. 64, 72




Induction 78

Induction hob
78x51
Dialogue system 
4 cooking zones
Bridge function

p. 64, 73




Induction 88 (panoramic)

Induction hob
88x40
Dialogue system 
4 cooking zones
Double bridge function

p. 64, 74



Induction 90

Induction hob
90x51
Dialogue system 
5 cooking zones
Bridge function

p. 64, 75




Level One

Raised performance

Level One integrates focused suction and a versatile induction hob, presenting itself as an essential object, characterised by the elegant combination of black satin aluminium, smoked glass and black glass.

It features touch controls and an integrated LED strip with dynamic light. Thanks to a motorised system, the downdraft hood lifts up to approach to the source of steam, depending on the height of the pans, optimising suction from the powerful and silent brushless motor.

The latter can also be positioned at the rear to make the most of the space inside the cabinet.

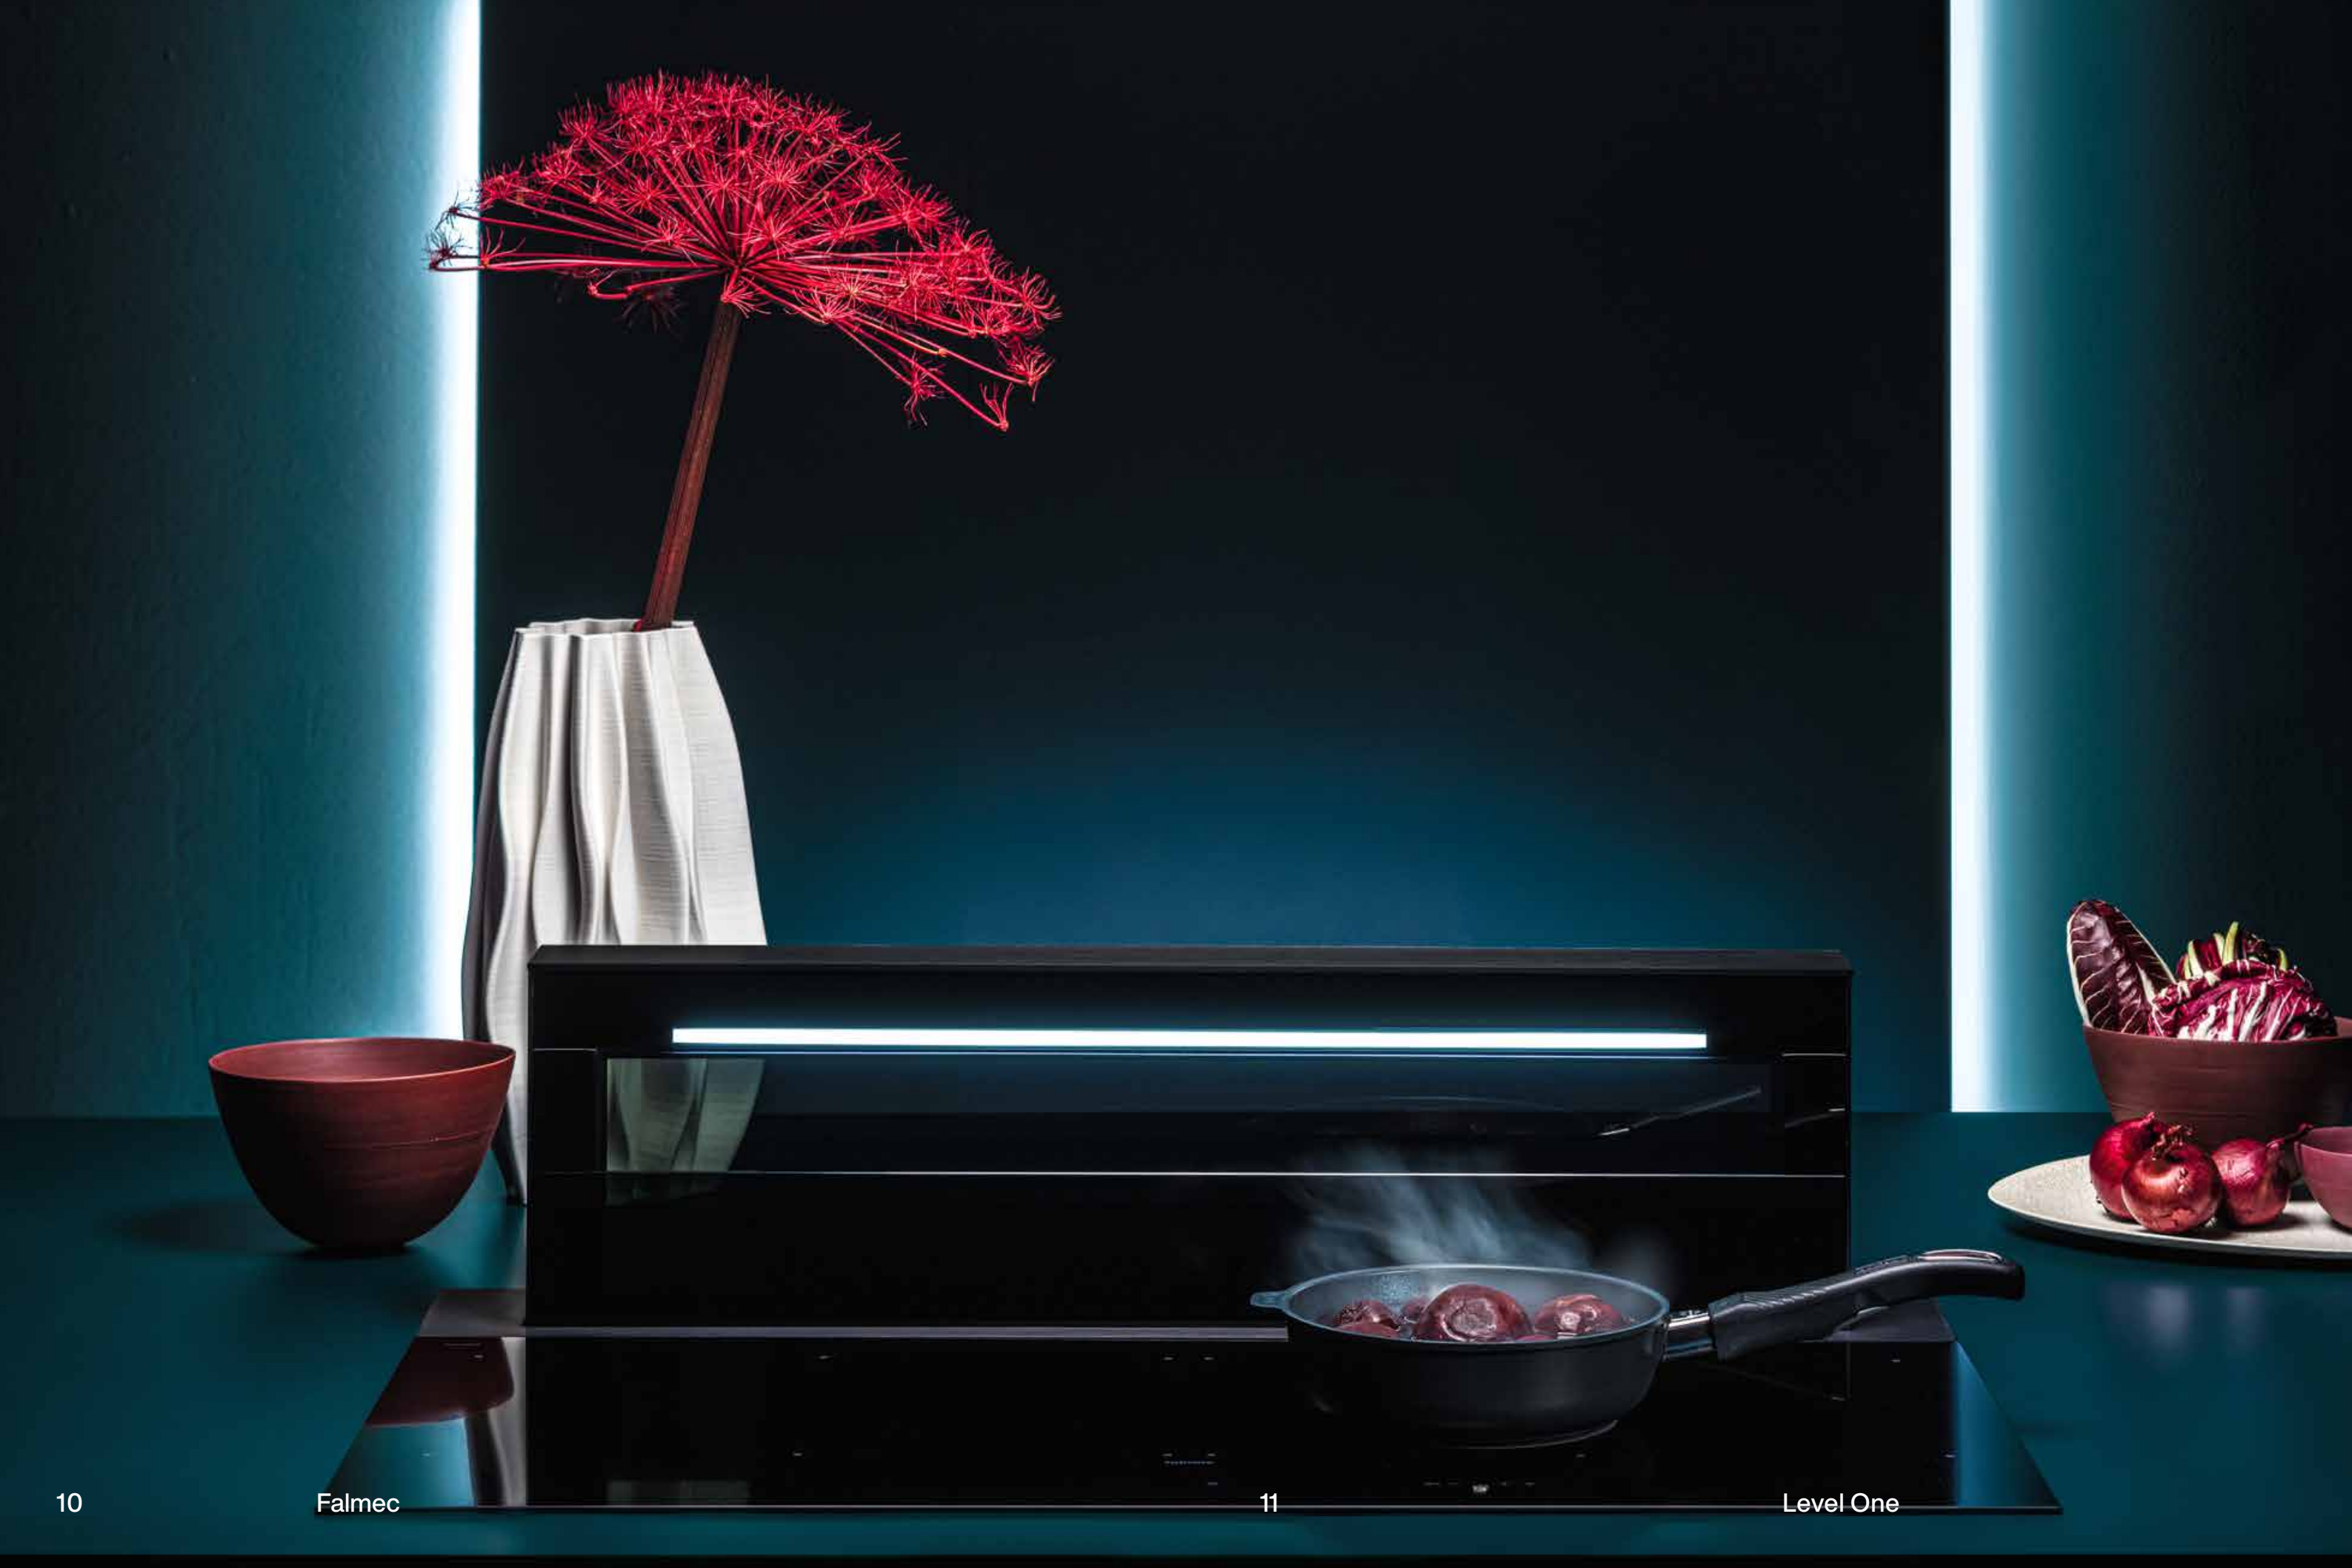





Integrated functions and optimised suction performance



Up/down system
The suction zone adjusts in height by moving closer to the steam source, thus adapting to the type of pan used during cooking.



Flex surface
The Flex surface technology of Level One includes a double bridge function that allows extremely versatile use even with large pans.



Obstacle-free cooking
Rear suction works conveniently on a large, continuous, obstacle-free cooking zone.



Silent power
The use of a powerful brushless motor (800 m3/h) ensures excellent suction performance and extreme silence, rediscovering the pleasure of living in the kitchen.



The best filtration
The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.



Automatic mode
Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.



Level One

Design Falmec Lab

Installation	Worktop
Function	Extracting/Filtering
Dimensions	90 cm
Materials/Finishes	Glass ceramic black glossy/black matt Aluminium satin black Glass smoked finishing
Features	Up/Down lift system with height adjustment Automode (suction speed automatically adjusts to cooking power) Grease and odour filter basket with liquid collection tray Motor position adjustment system to optimise cabinet space Flex Surface technology
Control	“Touch slider” control 9 cooking levels + boost
Speed	9 + boost
Power	Power level management from 2.8kW to 7.4kW
Sound level	Min. speed 44 dB(A) Max. speed 64 dB(A)
Motor	Brushless Motor 800 m³/h
Filters	Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional)
Lighting	Dynamic Light LED stripe 7 W - 2700 K / 5600 K
Voltage/Frequency	220-240V 50-60Hz
Net weight	44 kg
Energy class	A++
Cooking Functions	Residual heat indicators Recall function Keep warm function (44°) Automatic pot detection Automatic cut-off timer (for each cooking zone) Safety switch-off / safety lock function Pause function Double Bridge Function Chef function




Cooking zones layout


Dimension	4 x 190 x 210 mm	
Power	2,1 / 3 kW	
Pot	≥ ø110 mm (single) ≥ 230 mm (bridge)	

Code	Description
8034122367675	Level One - Worktop - 90 cm - Black glossy/white LED - 800 m3/h
8034122370101	Level One - Worktop - 90 cm - Black matt/white LED - 800 m3/h
Accessories	
KACL.1042	Carbon.Zeo Microtech regenerable filter


Frontal view

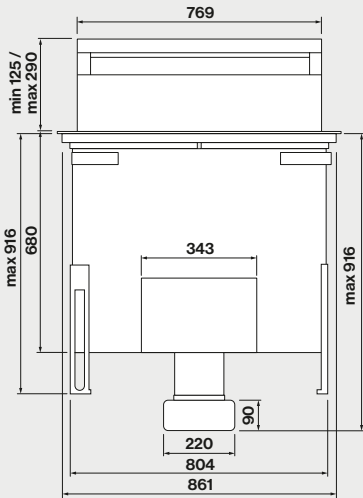


Side view with motor in front position

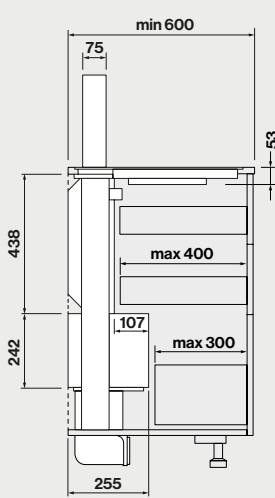

Side view with motor in rear position

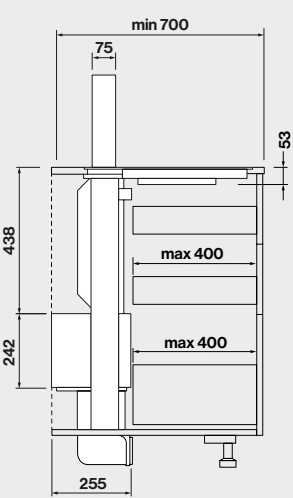


Top view

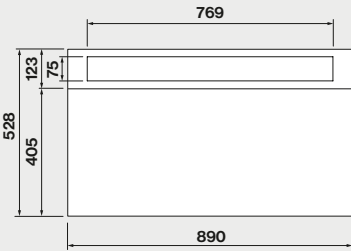


Type of installation



Topmounted



Flushmounted



Cut-out size

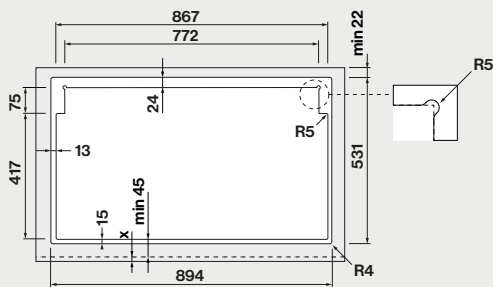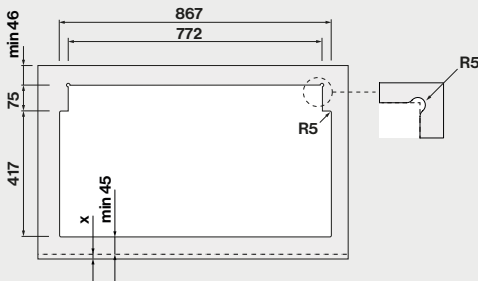



Brera


Invisible technology

Brera sits on the worktop as a single, essential element, on which the cooking and suction zones, defined by a thin gap, are closely aligned, creating a monochromatic effect. When in operation, the back opens automatically to draw in cooking fumes, perfectly balanced across the different zones. This configuration guarantees maximum freedom of use and cooking practicality, thanks to a large, even surface with no obstructions.



More
information
on Brera



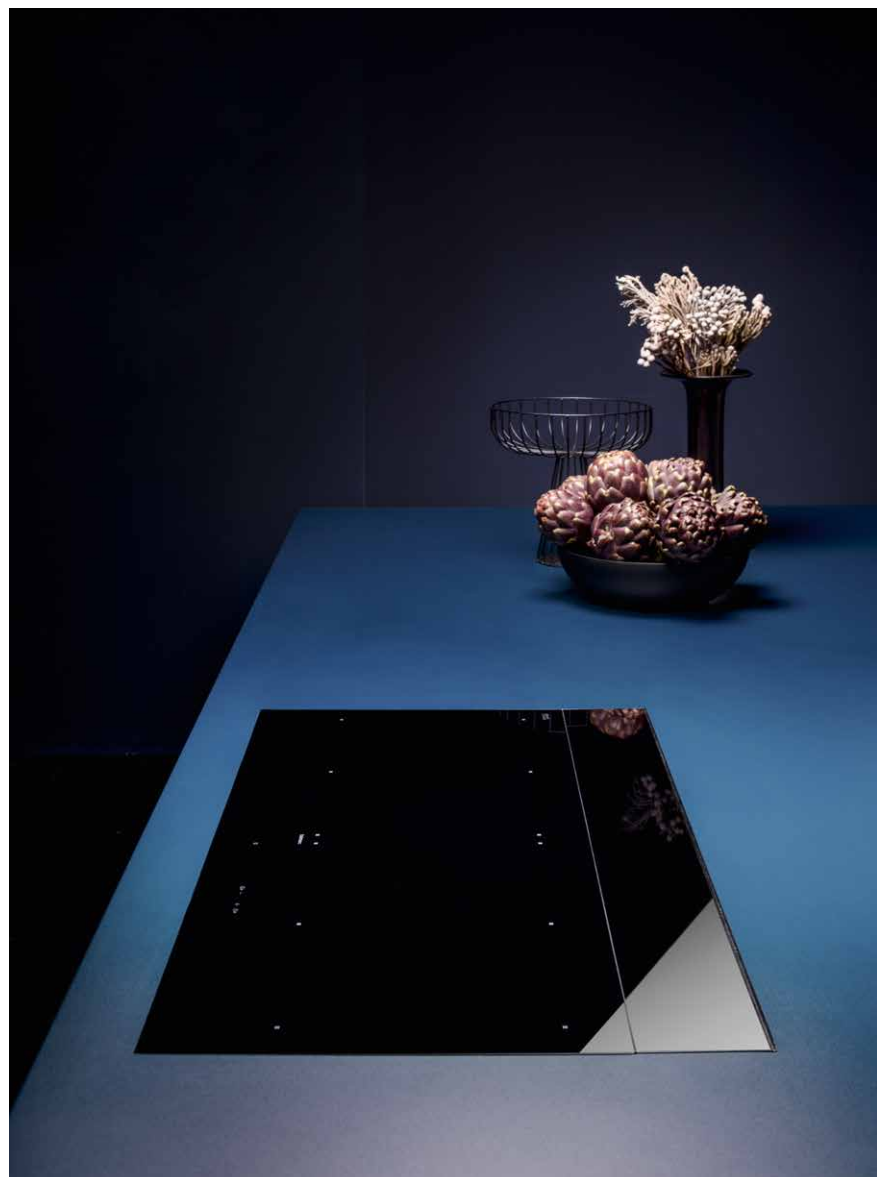

Energy
class

A+++

Inside, Brera conceals cutting-edge cooking technology and a powerful brushless motor that guarantees excellent suction performance, silence and energy efficiency. In the filtering version, Brera is equipped with exclusive Carbon.Zeo filters that can be inserted directly from above, for maximum practicality in maintenance.





Refined minimalism, with a technological heart



Silent power
The use of a powerful brushless motor (800 m3/h) ensures excellent suction performance, energy efficiency (A+++), and extreme silence, rediscovering the pleasure of living in the kitchen.



The best filtration
The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.



Invisible technology and essential design
Brera is distinguished by the uniformity of its surface. Thanks to the flush finish between the cooking zone and the suction element with automatic flap opening, aesthetics are elevated to their most essential form.



Easy cleaning and maintenance
The glass flap opening system conceals the functional part and allows easy cleaning. The anti-grease and Carbon.Zeo filters are located in an accessible removable basket.



Automatic mode
Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.



Obstacle-free cooking
Rear suction works conveniently on a large, continuous, obstacle-free cooking zone. Flex surface technology enables homogeneous cooking even with large pots.



The new matt glass ceramic finish allows the LED display to be clearly visible, reducing reflections, scratches and fingerprints. The elegant matt effect also makes the surface pleasant to the touch.

Brera

Optimising space

The Brera suction motor is positioned on the rear side of the structure to optimise the space available inside the cabinet. In fact, this feature allows to make the most of the volume both in height, by offering an additional drawer in the upper part (1), and in depth, in the island version (2). The possibility of rotating the motor by moving it to the rear permits the insertion of even larger drawers.




Silent performances

Brera is equipped with a powerful “brushless” motor that guarantees excellent suction performance and at the same time extreme silence, which can be further enhanced by the application of the “Silence kit” accessory (3). Brera (4) is also available in a recirculation version (5), with the exclusive Carbon.Zeo regenerable filter kit, which can be inserted from above, directly into the filter basket.



Brera


Design Falmec Lab

Installation	Worktop
Function	Extracting/Filtering
Dimensions	89 cm
Materials/Finishes	Glass ceramic black glossy/black matt
	
Features	Timer / minute minder Automode (suction speed automatically adjusts to cooking power) Motorized flap system Grease and odour filter basket with liquid collection tray Motor position adjustment system to optimise cabinet space Flex Surface technology
Control	“Touch slider” control 9 cooking levels + boost
Speed	9 + boost
Power	Power level management from 2.8kW to 7.4kW
Sound level	Min. speed 44 dB(A) Max. speed 65 dB(A)
Motor	Brushless Motor 800 m³/h
Filters	Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional)
Voltage/Frequency	220-240V 50-60Hz
Net weight	30 kg
Energy class	A+++
Cooking Functions	Residual heat indicators Recall function Keep warm function (44°) Automatic pot detection Automatic cut-off timer (for each cooking zone) Safety switch-off / safety lock function Pause function Double Bridge Function Chef function




Cooking zones layout

Cooking zones layout	4 x 190 x 210 mm
Power	2,1 / 3 kW
Pot	≥ ø110 mm (single) ≥ 230 mm (bridge)




Code	Description
8034122900353	Brera - Worktop - 89 cm - Black glossy/red LED - 800 m3/h
8034122901121*	Brera - Worktop - 89 cm - Black matt/white LED - 800 m3/h
Accessories	
KACL.1054	Carbon.Zeo Microtech regenerable filter
KACL.1026	Silence Kit


Frontal view




Top view




Side view with motor in front position



Side view with motor in rear position




Side view with motor in rear position with Silence Kit KACL.1026




Type of installation



Topmounted



Flushmounted



Cut-out size

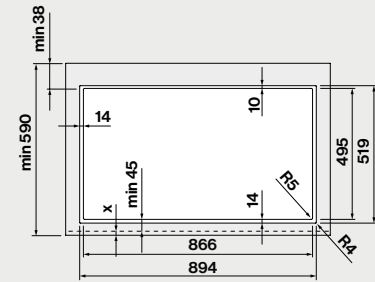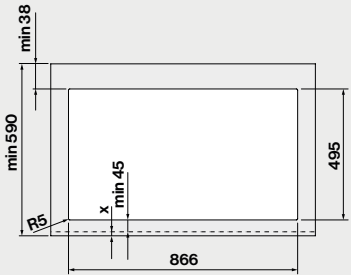



Brera 75


Design Falmeac Lab

Installation	Worktop
Function	Extracting/Filtering
Dimensions	75 cm
Materials/Finishes	Glass ceramic black glossy/black matt
	
Features	Motorized flap system Timer / minute minder Automode (suction speed automatically adjusts to cooking power) Grease and odour filter basket with liquid collection tray Motor position adjustment system to optimise cabinet space Flex Surface technology
Control	“Touch slider” control 9 cooking levels + boost
Speed	9 + boost
Power	Power level management from 2.8kW to 7.4kW
Sound level	Min. speed 44 dB(A) Max. speed 65 dB(A)
Motor	Brushless Motor 800 m³/h
Filters	Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter (optional)
Voltage/Frequency	220-240V 50-60Hz
Net weight	30 kg
Energy class	A+++
Cooking Functions	Residual heat indicators Recall function Keep warm function (44°) Automatic pot detection Automatic cut-off timer (for each cooking zone) Safety switch-off / safety lock function Pause function Chef function Bridge function




Cooking zones layout

Cooking zones layout	2 x ø175 mm	2 x 190 x 210 mm
Power	1,4 / 2,1 kW	2,1 / 3 kW
Pot	≥ ø90 mm	≥ ø110 mm (single) ≥ 230 mm (bridge)




Code	Description
8034122901039	Brera 75 - Worktop - 75 cm - Black glossy/red LED - 800 m3/h
8034122901114*	Brera 75 - Worktop - 75 cm - Black matt/white LED - 800 m3/h
Accessories	
KACL.1037	Carbon.Zeo Microtech regenerable filter
KACL.1026	Silence Kit


Frontal view




Side view with motor in front position




Top view



Side view with motor
in rear position




Side view with motor in rear position with Silence Kit KACL.1026




Type of installation



Topmounted



Flushmounted



Cut-out size



Zero

Versatile integration

Zero is characterised by a clean, minimalist design that allows perfect integration into the kitchen worktop. The central suction part has a glass panel that can be moved to centralise the air flow where it is needed. The hob is equipped with inductors featuring “Flex surface” technology to accommodate different sizes and types of pots and pans. Its perfectly smooth design and access from above to the functional area ensures easy cleaning and maintenance.



More
information
on Zero








Air Slide System

The suction can be directed as required, thanks to a slider that allows the airflow to be concentrated according to the position of the pan. This element can be quickly lifted to access the grease and odour filters, both of which can be easily removed from above.

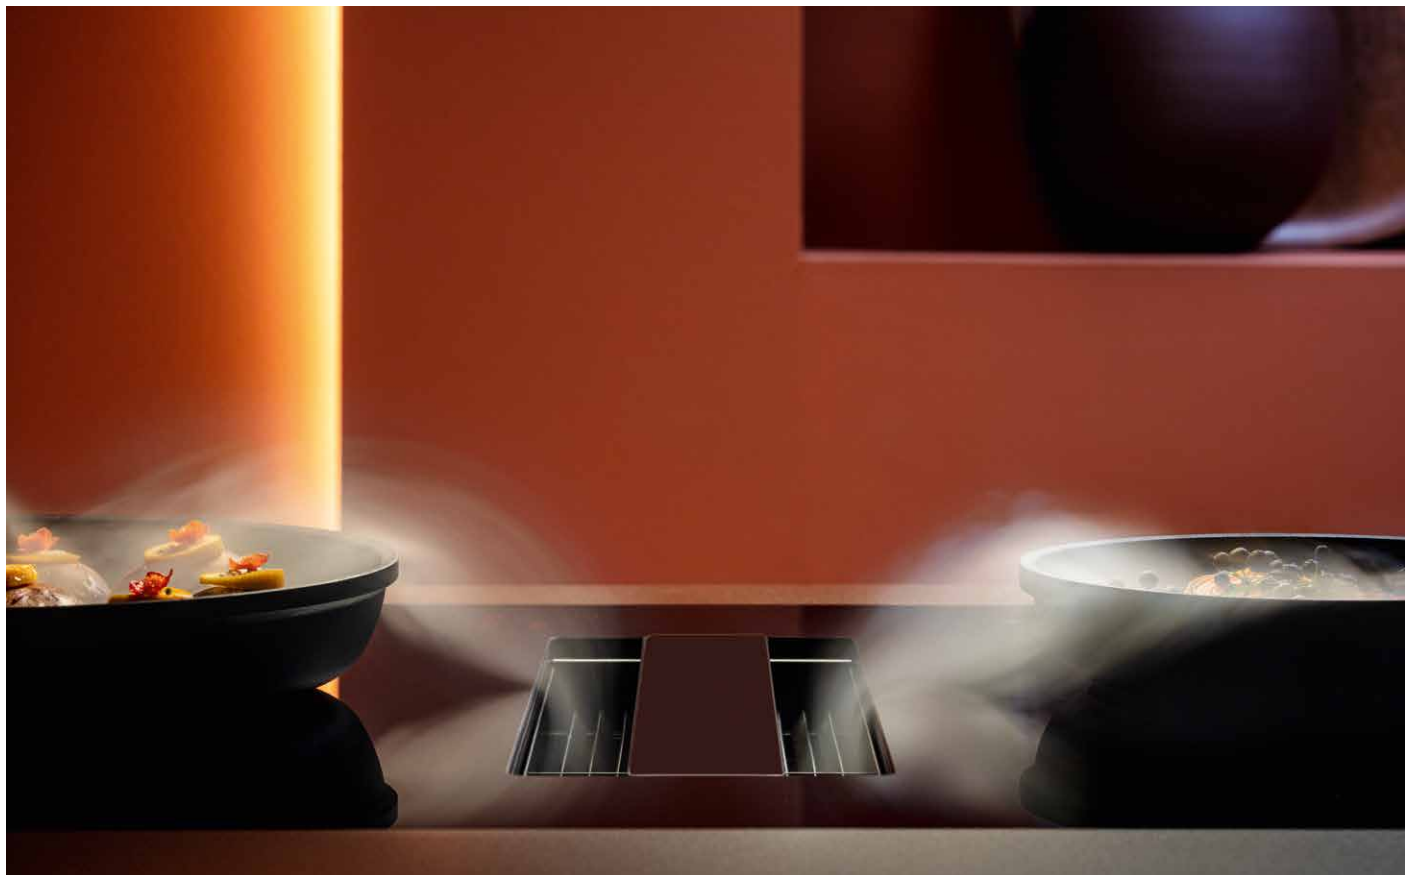

Clean aesthetics, functionality and absolute precision



Flat design
With its elegant interplay of geometrics, Zero is characterised by the rigour of its design, which is clean and unobtrusive and allows perfect integration into the kitchen worktop.



Air Slide System
The suction is oriented according to the need thanks to a sliding element that allows the suction power to be focused towards the position of the pan. Suction is precise and consumption is reduced.



Simplified installation and maintenance
Zero Easy is the "plug-and-play" version with a rear outlet that is easy to install as it requires no ducting. This configuration enables full use of the cabinet. The odour filter integrated in the suction body is removable from above for easy maintenance.



Cleaning convenience
The sliding suction element also serves as a handle for maintenance and cleaning of the grill, the odour filter and the tray for collecting liquids.



The best filtration
The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.




Automatic mode
Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.



Zero - Glass ceramic black glossy with red LEDs


Zero

In extraction mode, Zero directs air outwards through a duct hidden in the cabinet (1). At any time it is possible to add the Carbon.Zeo filter kit (2) which allows the reduction of odours and humidity from cooking fumes, thanks to the natural properties of carbon and zeolite.

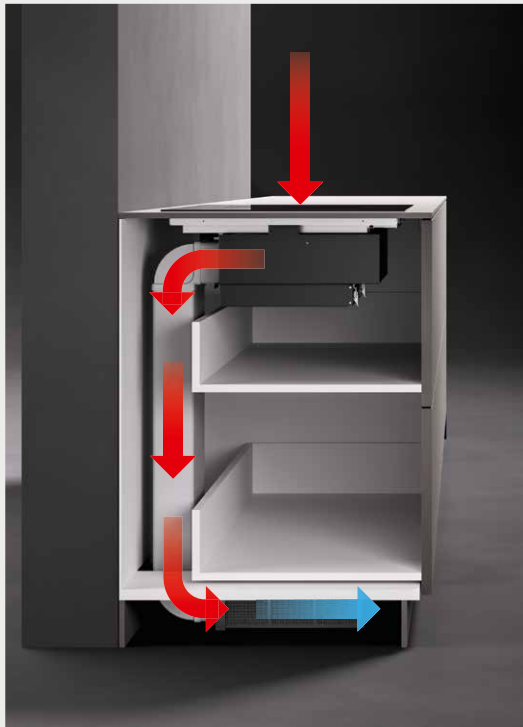


Zero Easy

Zero is also available in the Easy version (3), with exclusive Carbon.Zeo filter incorporated in the structure and direct outlet at the rear, to make the best use of the cabinet space in depth. Its extreme simplicity allows both “plug-and-play” installation, as well as very easy maintenance, thanks to the extraction of the Carbon.Zeo filter directly from above.

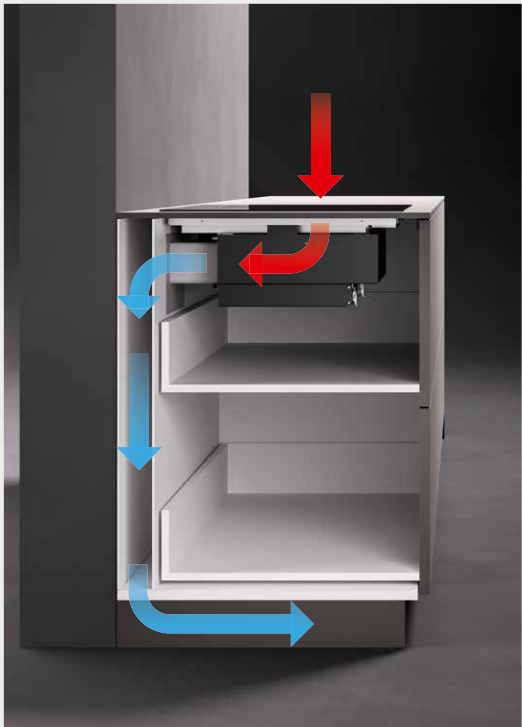

Zero


Design Falmec Lab

Installation	Worktop
Function	Extracting/Filtering
Dimensions	76 cm/84 cm
Materials/Finishes	Glass ceramic black glossy
	
Features	Timer / minute minder Automode (suction speed automatically adjusts to cooking power) Air Slide System to direct the suction Emptyable liquid collector Flex Surface technology
Control	“Touch slider” control 9 cooking levels + boost
Speed	9 + boost
Power	Power level management from 2.8kW to 7.4kW
Sound level	Min. speed 57 dB(A) Max. speed 69 dB(A)
Motor	Brushless Motor 600 m³/h
Filters	Metallic grease filter, removable and washable Combined regenerable Carbon.Zeo filter (optional)
Voltage/Frequency	220-240V 50-60Hz
Net weight	23/28 kg
Energy class	A+
Cooking Functions	Residual heat indicators Recall function Keep warm function (44°) Automatic pot detection Automatic cut-off timer (for each cooking zone) Safety switch-off / safety lock function Pause function Bridge function



Cooking zones layout


Dimension	2 x 210 x 190 mm	1 x ø175 mm	1 x ø215 mm
Power	2,1 / 3 kW	1,4 / 2,1 kW	2,3 / 3 kW
Pot	≥ ø110 mm (single)) ≥ 230 mm (bridge)	≥ ø90 mm	≥ ø110 mm




Code	Description
8034122901060	Zero - Worktop - 76 cm - Black glossy/red LED - 600 m3/h
8034122900933	Zero - Worktop - 84 cm - Black glossy/red LED - 600 m3/h
Accessories	
KACL.951	Carbon filter unit under base Slim h60 mm
KACL.930	Carbon.Zeo filter unit under base h100 mm
KACL.931	Filter spare part Carbon.Zeo for vertical outlet and under base kit h100 mm
KACL.952	Filter spare part for underbase Slim filter unit - h60 mm
KACL.955	Grid for air outlet (filter unit kit under base Slim - h60 mm)
KACL.155#NF	Black frame - 84 cm

Zero 76 cm


Frontal view

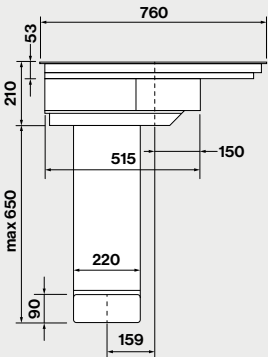

Top view




Side view




Zero 84 cm


Frontal view

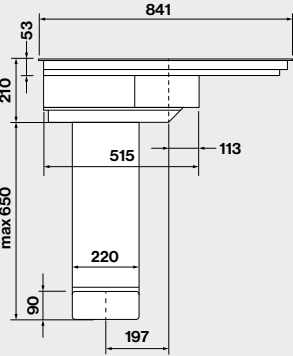

Top view




Side view




Zero 76 cm - Type of installation



Topmounted



Flushmounted




Cut-out size




Zero 84 cm - Type of installation



Topmounted



Flushmounted



Cut-out size





Zero Easy - Glass ceramic black matt with white LEDs

Zero Easy


Design Falmec Lab

Installation	Worktop
Function	Filtering
Dimensions	76 cm/84 cm
Materials/Finishes	Glass ceramic black glossy/black matt
Features	Timer / minute minder Automode (suction speed automatically adjusts to cooking power) Air Slide System to direct the suction Emptyable liquid collector Flex Surface technology
Control	“Touch slider” control 9 cooking levels + boost
Speed	9 + boost
Power	Power level management from 2.8kW to 7.4kW
Sound level	Min. speed 47 dB(A) Max. speed 65 dB(A)
Motor	Brushless Motor 600 m³/h
Filters	Metallic grease filter, removable and washable Carbon.Zeo Microtech regenerable filter
Voltage/Frequency	220-240V 50-60Hz
Net weight	23/28 kg
Energy class	A+
Cooking Functions	Residual heat indicators Recall function Keep warm function (44°) Automatic pot detection Automatic cut-off timer (for each cooking zone) Safety switch-off / safety lock function Pause function Bridge function



Cooking zones layout


Dimension	2 x 210 x 190 mm	1 x ø175 mm	1 x ø215 mm
Power	2,1 / 3 kW	1,4 / 2,1 kW	2,3 / 3 kW
Pot	≥ ø110 mm (single)) ≥ 230 mm (bridge)	≥ ø90 mm	≥ ø110 mm




Code	Description
8034122901077	Zero Easy - Worktop - 76 cm - Black glossy/red LED - 600 m3/h
8034122901138*	Zero Easy - Worktop - 76 cm - Black matt/white LED - 600 m3/h
8034122900940	Zero Easy - Worktop - 84 cm - Black glossy/red LED - 600 m3/h
8034122901145*	Zero Easy - Worktop - 84 cm - Black matt/white LED - 600 m3/h
Accessories	
KACL.1043	Regenerable Carbon.Zeo Microtech filter (spare part)
KACL.1036	Anti-noise conveyer
KACL.155#NF	Black frame - 84 cm

Zero Easy 76 cm


Frontal view




Top view



Rear view




Side view




Zero Easy 84 cm


Frontal view




Top view



Rear view




Side view




Zero Easy 76 cm - Type of installation



Topmounted



Flushmounted




Cut-out size




Zero Easy 84 cm - Type of installation



Topmounted



Flushmounted



Cut-out size





Quantum Pro

Advanced performance

Quantum Pro has a minimalist design, enhanced by a central element with opening glass flaps that gives it a professional yet elegant appeal. Every construction and technological detail is designed to combine excellent performance in terms of suction and low noise levels. Quantum Pro is also available in an Easy version that offers maximum ease of installation and maintenance, thanks to the Carbon.Zeo filter integrated in the hood body and the direct outlet at the rear.




More
information on
Quantum Pro



Automatic flaps
The glass flaps open automatically to improve the aerodynamics of the incoming air, enabling better suction efficiency. Once closed, the system achieves perfect colour uniformity on the surface, hiding the functional part, with a pleasant aesthetic effect.



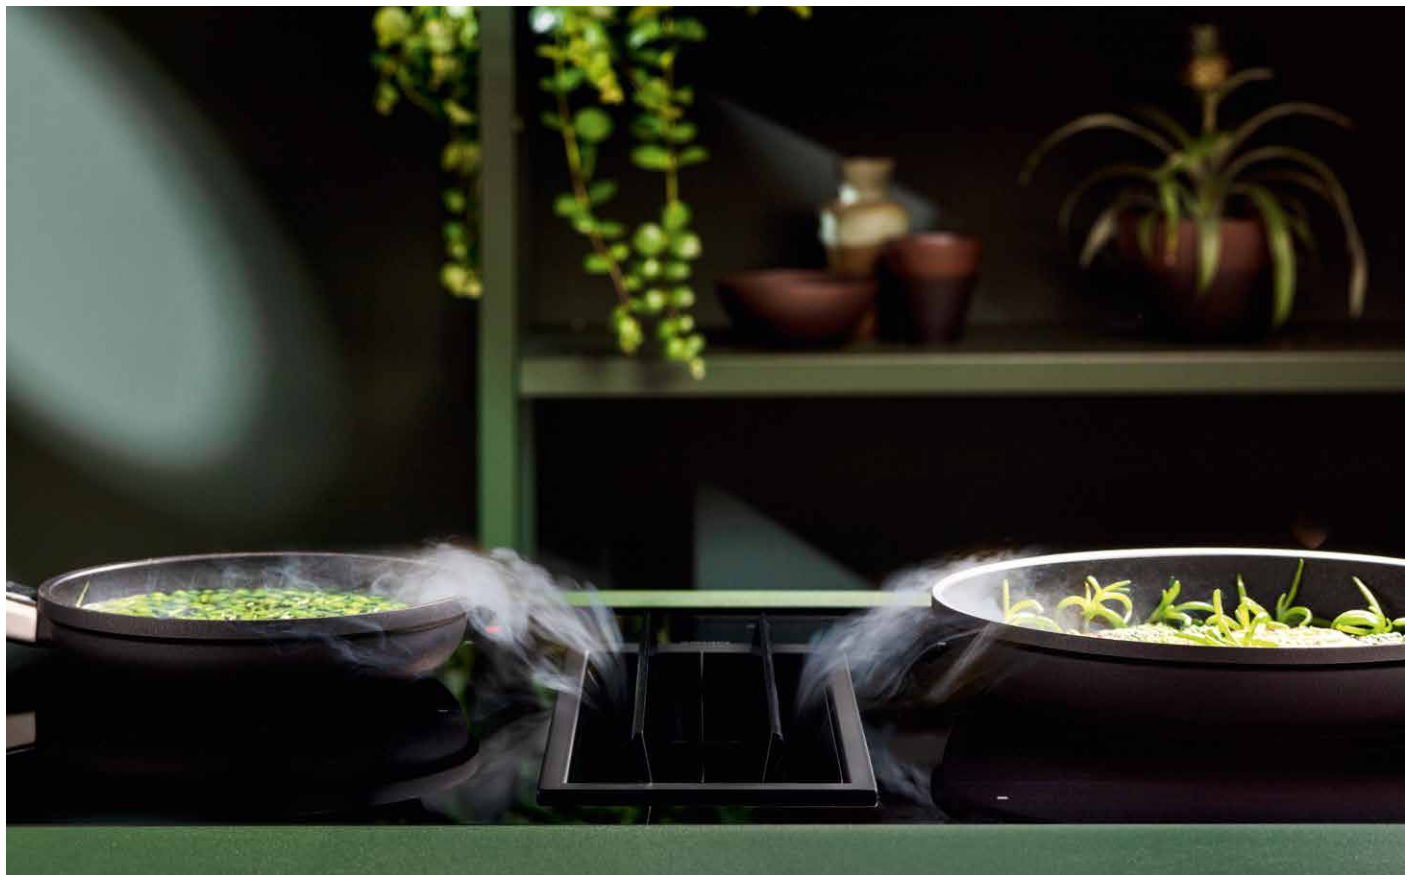

Design uniformity, performance versatility



Flap System
The suction area is opened by two glass flaps that give uniformity of colour throughout the cooking area when closed. The scratch-resistant black steel frame that defines the suction zone is designed to prevent accidental liquid spillage during cooking.



Flex surface
The Flex surface technology of Quantum Pro includes a double bridge function that allows extremely versatile use even with large pans.



Simplified installation
Quantum Pro Easy is the plug-and-play version with a rear outlet simple to install as it requires no ducting. This configuration makes full use of the cabinet depth.



Cleaning convenience
The glass flap opening system conceals the functional part and allows easy cleaning.



The best filtration
The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.



Automatic mode
Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.



Quantum Pro

In extraction mode, Quantum Pro directs air outwards through a duct hidden in the cabinet (1). At any time it is possible to add the Carbon.Zeo filter kit (2) which allows the reduction of odours and humidity from cooking fumes, thanks to the natural properties of carbon and zeolite.




Quantum Pro Easy

Quantum Pro is also available in the Easy version (3). With exclusive Carbon.Zeo filter incorporated in the structure and direct outlet at the rear, it offers maximum practicality in installation and makes the best use of the cabinet depth. In addition, its extreme simplicity allows for easy maintenance.



Quantum Pro


Design Falmec Lab

Installation	Worktop
Function	Extracting/Filtering
Dimensions	84 cm
Materials/Finishes	Glass ceramic black glossy
	
Features	Automode (suction speed automatically adjusts to cooking power) Motorized flap system Emptyable liquid collector Anti-liquid spillage central frame Flex Surface technology
Control	“Touch slider” control 9 cooking levels + boost
Speed	9 + boost
Power	Power level management from 2.8kW to 7.4kW
Sound level	Min. speed 46 dB(A) Max. speed 64 dB(A)
Motor	Brushless Motor 600 m³/h
Filters	Metallic grease filter, removable and washable Carbon.Zeo regenerable filter (optional)
Voltage/Frequency	220-240V 50-60Hz
Net weight	27 kg
Energy class	A+
Cooking Functions	Timer for each cooking zone Recall function Keep warm function (44°) Automatic pot detection Safety switch-off / safety lock function Pause function Double Bridge Function




Cooking zones layout

Dimension	4 x 210 x 190 mm
Power	2,1 / 3 kW
Pot	≥ ø110 mm (single) ≥ 230 mm (bridge)




Code	Description
8034122900339	Quantum Pro - 84 cm - Black glossy/red LED - 600 m3/h
Accessories	
KACL.951	Carbon filter unit under base Slim h60 mm
KACL.930	Carbon.Zeo filter unit under base h100 mm
KACL.931	Filter spare part Carbon.Zeo for vertical outlet and under base kit h100 mm
KACL.952	Filter spare part for underbase Slim filter unit - h60 mm
KACL.955	Grid for air outlet (filter unit kit under base Slim - h60 mm)
KACL.155#NF	Black frame - 84 cm


Frontal view



Top view




Side view




Type of installation



Topmounted



Flushmounted




Cut-out size



Quantum Pro Easy


Design Falmec Lab

Installation	Worktop
Function	Filtering
Dimensions	84 cm
Materials/Finishes	Glass ceramic black glossy
	
Features	Automode (suction speed automatically adjusts to cooking power) Motorized flap system Emptyable liquid collector Anti-liquid spillage central frame Flex Surface technology
Control	“Touch slider” control 9 cooking levels + boost
Speed	9 + boost
Power	Power level management from 2.8kW to 7.4kW
Sound level	Min. speed 46 dB(A) Max. speed 64 dB(A)
Motor	Brushless Motor 600 m³/h
Filters	Metallic grease filter, removable and washable Carbon.Zeo regenerable filter
Voltage/Frequency	220-240V 50-60Hz
Net weight	26 kg
Energy class	A+
Cooking Functions	Timer for each cooking zone Recall function Keep warm function (44°) Automatic pot detection Safety switch-off / safety lock function Pause function Double Bridge Function




Cooking zones layout

Dimension	4 x 210 x 190 mm
Power	2,1 / 3 kW
Pot	≥ ø110 mm (single) ≥ 230 mm (bridge)




Code	Description
8034122900346	Quantum Pro Easy - 84 cm - Black glossy/red LED - 600 m3/h
Accessories	
KACL.963	Carbon.Zeo filter (spare part)
KACL.155#NF	Black frame - 84 cm


Frontal view




Top view



Rear view




Side view




Type of installation



Topmounted



Flushmounted



Cut-out size



Induction hobs

The best match

Falmec offers a new collection of induction hobs, specifically created to integrate with the design and functionality of its hoods. Maximum precision in temperature management, rapidity in reaching the perfect cooking point, dimensions suitable for all space and movement requirements: with Falmec induction hobs it is easy to achieve extraordinary results in the kitchen.






Dialogue System

Connectivity between cooker hood and hob
Through the Dialogue System it is now possible to control the different functions of the hood directly from the hob, where a touch control has been integrated. The dialogue between hob and cooker hood takes place via radio frequency and does not require any other receiving devices to be installed in the hood.


📶 Dialogue System

The Dialogue System is compatible with all Falmec hoods that are designed to be radio-controlled. In automatic operation the Dialogue System independently adjusts the suction power according to actual need, guaranteeing extreme ease of use and the best ratio between consumption and performance.




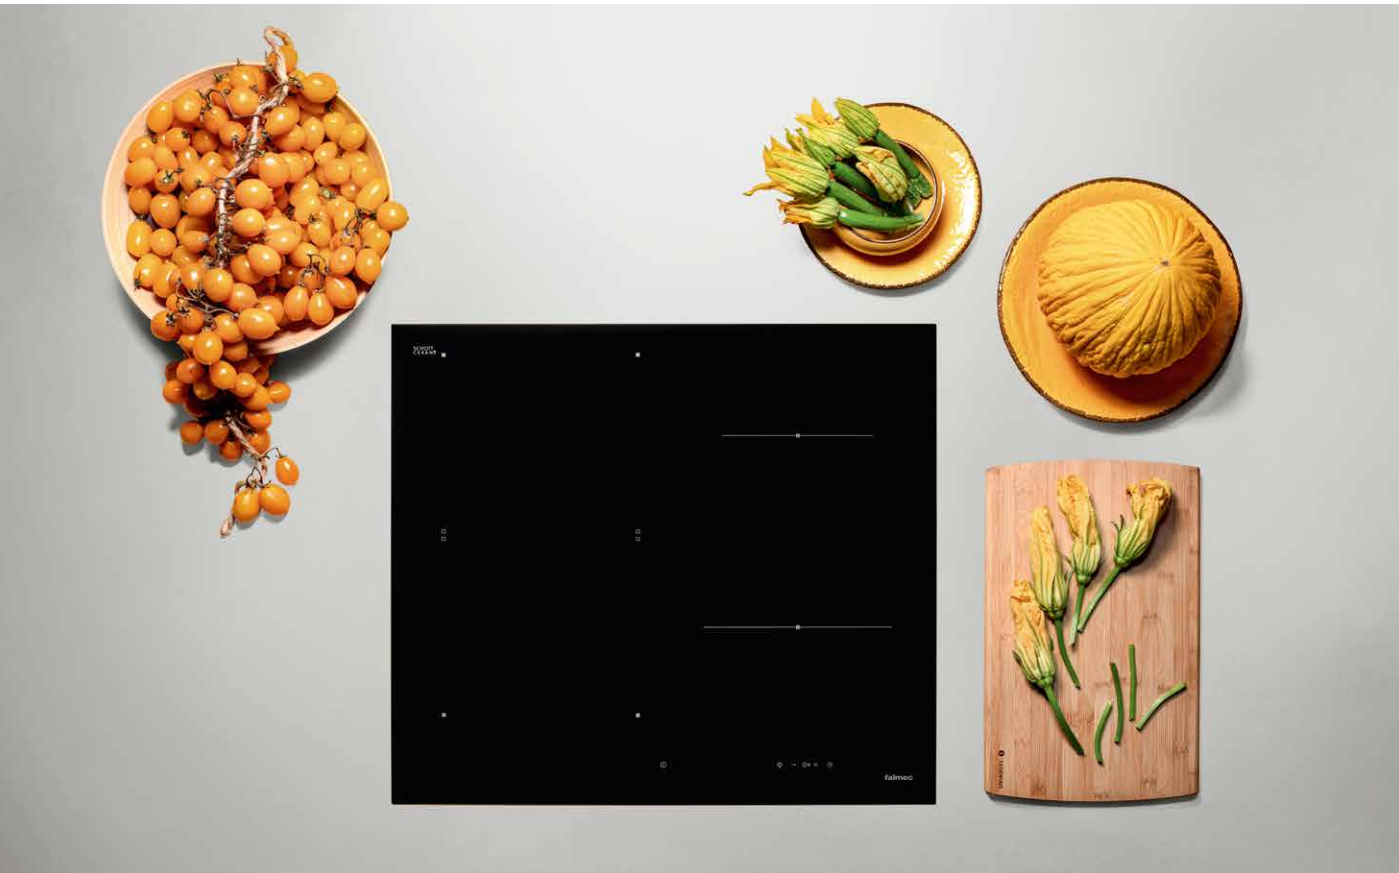

Induction hob 58 cm

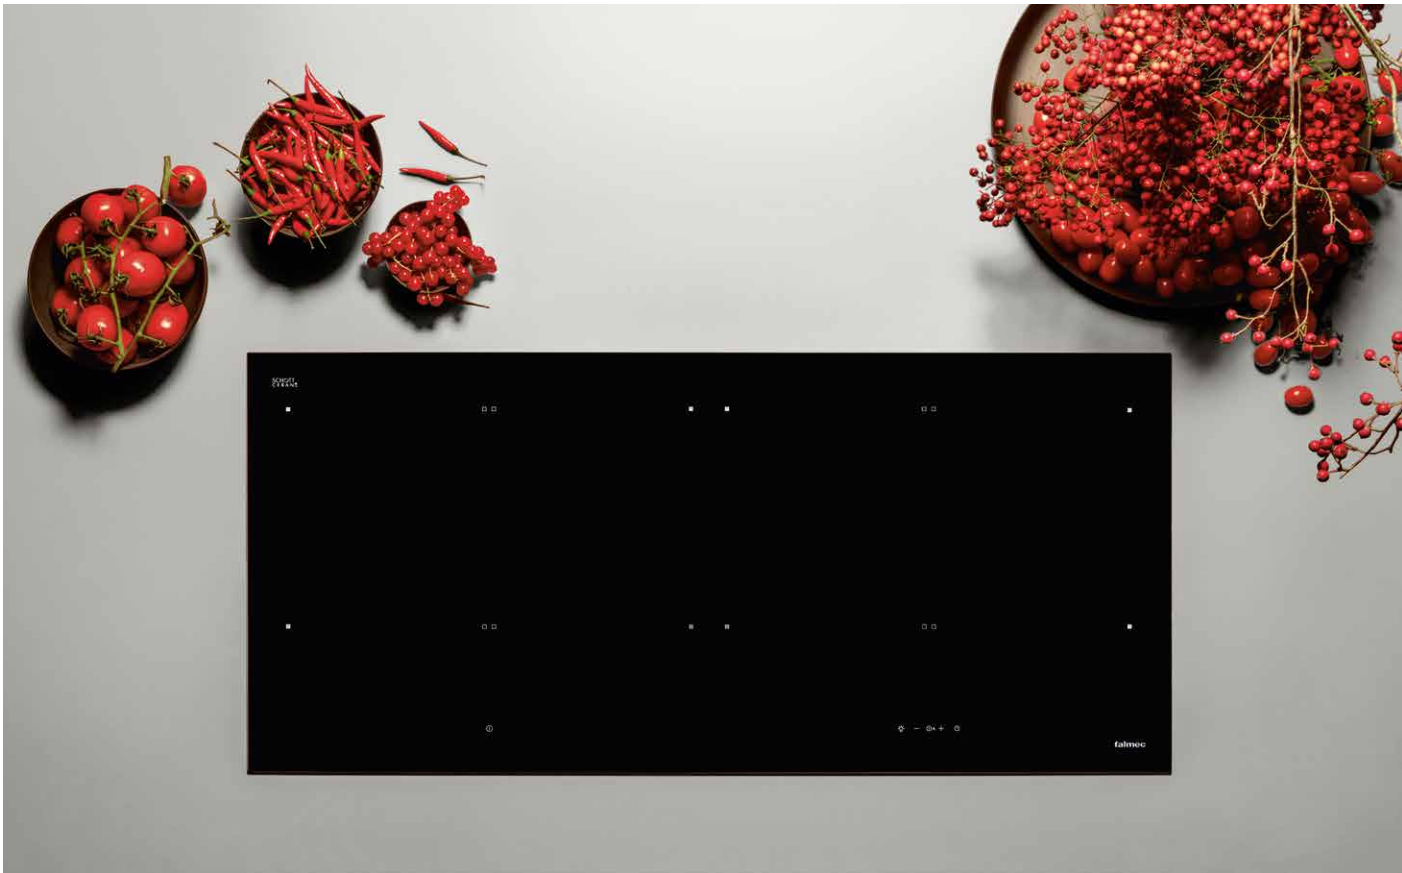

Panoramic induction hob 88 cm

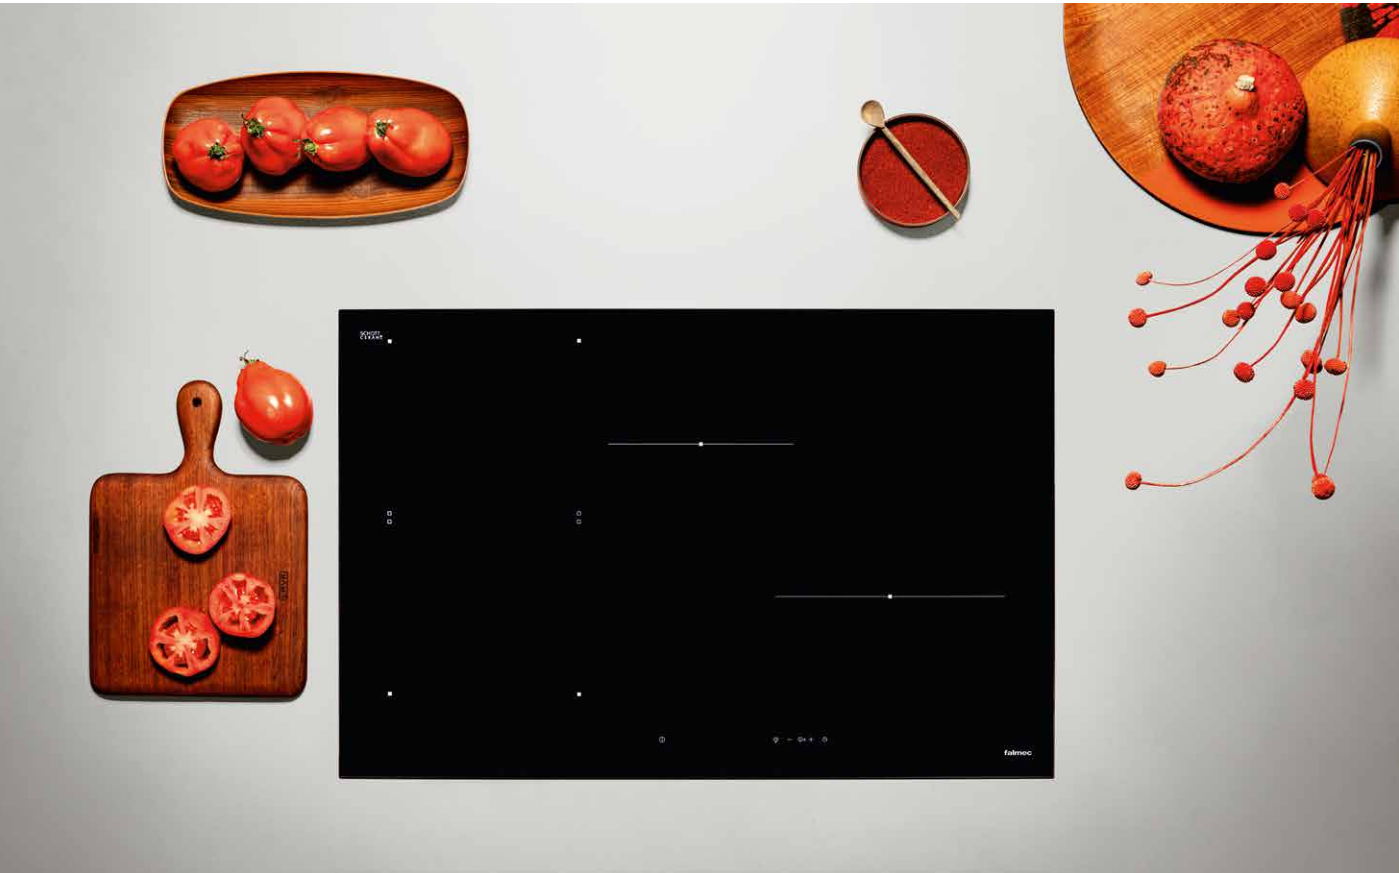


Induction hob 78 cm




Induction hob 90 cm


Induction hob 58 cm

Design Falmec Lab

Installation	Worktop
Dimensions	58 cm
Materials/Finishes	Glass ceramic black glossy
Features	Flex Surface technology
Control	9 cooking levels + boost Touch control with LED display Dialogue system 
Power	Power level management from 2.8kW to 7.4kW
Voltage/Frequency	220-240V 50-60Hz
Net weight	9 kg
Cooking Functions	4 cooking zones with automatic pots recognition Residual heat indicators Timer for each cooking zone Recall function Keep warm function (44°) Pause function Chef function Bridge function

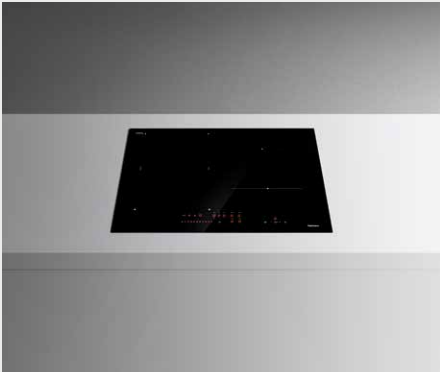


Cooking zones layout			
Dimension	2 x 210 x 190 mm	1 x ø175 mm	1 x ø215 mm
Power	2,1 / 3 kW	1,4 / 2,1 kW	2,3 / 3 kW
Pot	≥ ø110 mm (single) ≥ 230 mm (bridge)	≥ ø90 mm	≥ ø110 mm



Frontal view	Side view	Type of installation	
		Topmounted	Flushmounted
Top view		Cut-out size	
Code	Description		
8034122900896	Induction hob 58 cm - Black glossy/red LED - 4 cooking zones		


Induction hob 78 cm

Design Falmec Lab

Installation	Worktop
Dimensions	78 cm
Materials/Finishes	Glass ceramic black glossy
Features	Flex Surface technology
Control	9 cooking levels + boost Touch control with LED display Dialogue system 
Power	Power level management from 2.8kW to 7.4kW
Voltage/Frequency	220-240V 50-60Hz
Net weight	11 kg
Cooking Functions	4 cooking zones with automatic pots recognition Residual heat indicators Timer for each cooking zone Recall function Keep warm function (44°) Pause function Chef function Bridge function



Cooking zones layout			
Dimension	2 x 210 x 190 mm	1 x ø215 mm	1 x ø265 mm
Power	2,1 / 3 kW	2,3 / 3 kW	2,3 / 3 kW
Pot	≥ ø110 mm (single) ≥ 230 mm (bridge)	≥ ø110 mm	≥ ø130 mm



Frontal view	Side view	Type of installation	
		Topmounted	Flushmounted
Top view		Cut-out size	
Code	Description		
8034122900902	Induction hob 78 cm - Black glossy/red LED - 4 cooking zones		

Panoramic induction hob 88 cm

Design Falmec Lab


Installation	Worktop
Dimensions	88 cm
Materials/Finishes	Glass ceramic black glossy
Features	Flex Surface technology
Control	9 cooking levels + boost Touch control with LED display Dialogue system
Power	Power level management from 2.8kW to 7.4kW
Voltage/Frequency	220-240V 50-60Hz
Net weight	10 kg
Cooking Functions	Residual heat indicators Timer for each cooking zone Keep warm function (44°) Pause function Chef function Bridge function Automatic pot detection Recall function




Cooking zones layout

Dimension	4 x 190 x 210 mm	
Power	2,1 / 3 kW	
Pot	≥ ø110 mm (single) ≥ 230 mm (bridge)	

Frontal view




Side view




Type of installation


Topmounted




Flushmounted



Top view



Cut-out size

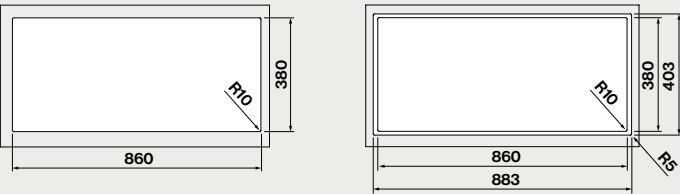

Code	Description
8034122900919	Panoramic Induction hob 88 cm - Black glossy/red LED - 4 cooking zones

Induction hob 90 cm

Design Falmec Lab


Installation	Worktop
Dimensions	90 cm
Materials/Finishes	Glass ceramic black glossy
Features	Flex Surface technology
Control	9 cooking levels + boost Touch control with LED display Dialogue system
Power	Power level management from 2.8kW to 10.4kW
Voltage/Frequency	220-240V 50-60Hz
Net weight	13 kg
Cooking Functions	Residual heat indicators Timer for each cooking zone Recall function Keep warm function (44°) Automatic pot detection Pause function Chef function Bridge function




Cooking zones layout

Dimension	2 x 210 x 190 mm	1 x ø265 mm	2 x ø175 mm
Power	2,1 / 3 kW	2,3 / 3 kW	1,4 / 2,1 kW
Pot	≥ ø110 mm (single) ≥ 230 mm (bridge)	≥ ø130 mm	≥ ø90 mm

Frontal view




Side view




Type of installation


Topmounted




Flushmounted



Top view



Cut-out size

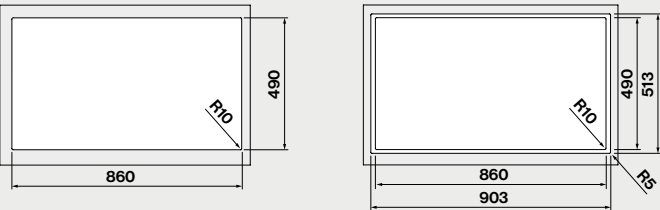

Code	Description
8034122900926	Induction hob 90 cm - Black glossy/red LED - 5 cooking zones

Technical data
and accessories

Glossary of functions

Cooking

A. Turn on and switch off (Induction hob)

B. Touch slider control

C. Bridge
Allows simultaneous use of two cooking zones for rectangular and oval pans

D. Keep Warm
Keeps food warm thanks to a temperature of 44 °C

E. Pause
Suspends operation of all cooking zones

F. Recall

Recovers previous cooking settings after accidental switch-off

G. Chef

Enables all available cooking zones to be used with different preset power levels

H. Safety control lock

Control lock to prevent accidental operation

I. Automatic pot detection

Recognises when the pot is placed on the cooking surface. Automatically switches on the zone and simultaneously illuminates the corresponding power selector, enabling the setting

L. Cooking zone power level / Residual heat indicator

If the surface of the hob is still hot after cooking the display will show the letter H

M. Boost (Heat up)

Increases the power of a single cooking zone allowing rapid and intense heat

N. Timer

Function for each cooking zone or independent. It allows time to be set, at the end of which an acoustic signal is emitted

Suction

O. Turn on and switch off (hood) / Automatic suction (Automode)



Suction power is adapted to the cooking

P. Switch-off timer / Maintenance

With the hood in operation it switches the suction off after 15 minutes / When the hood is off, maintenance is started

Q. Touch control

Sets suction power

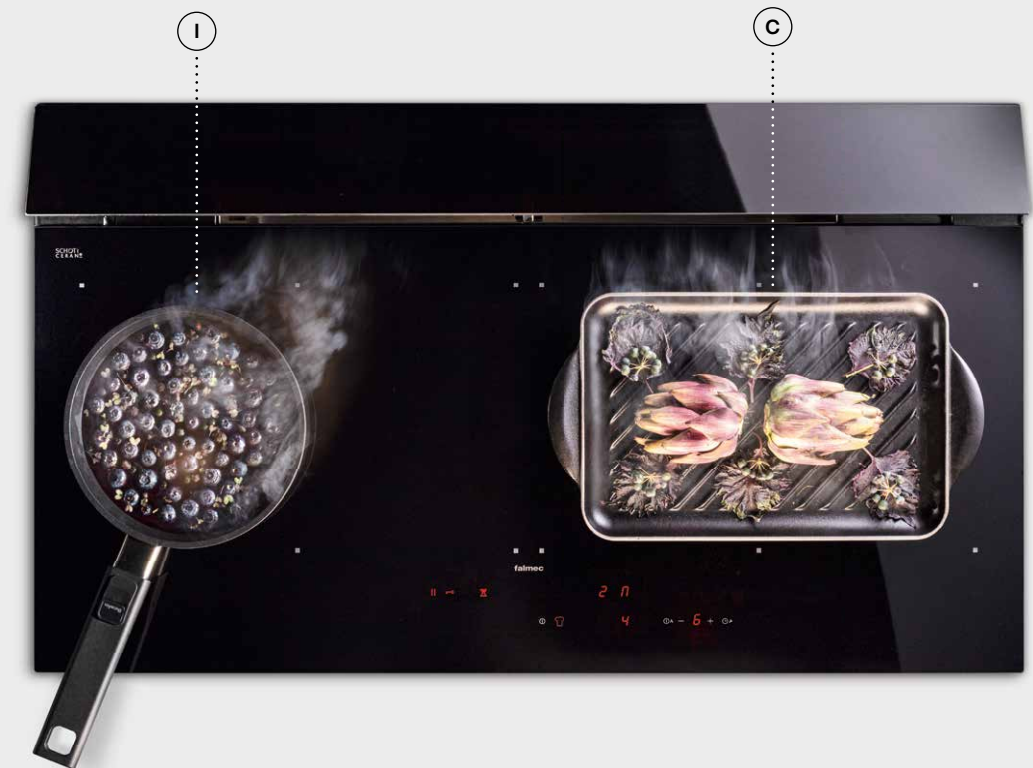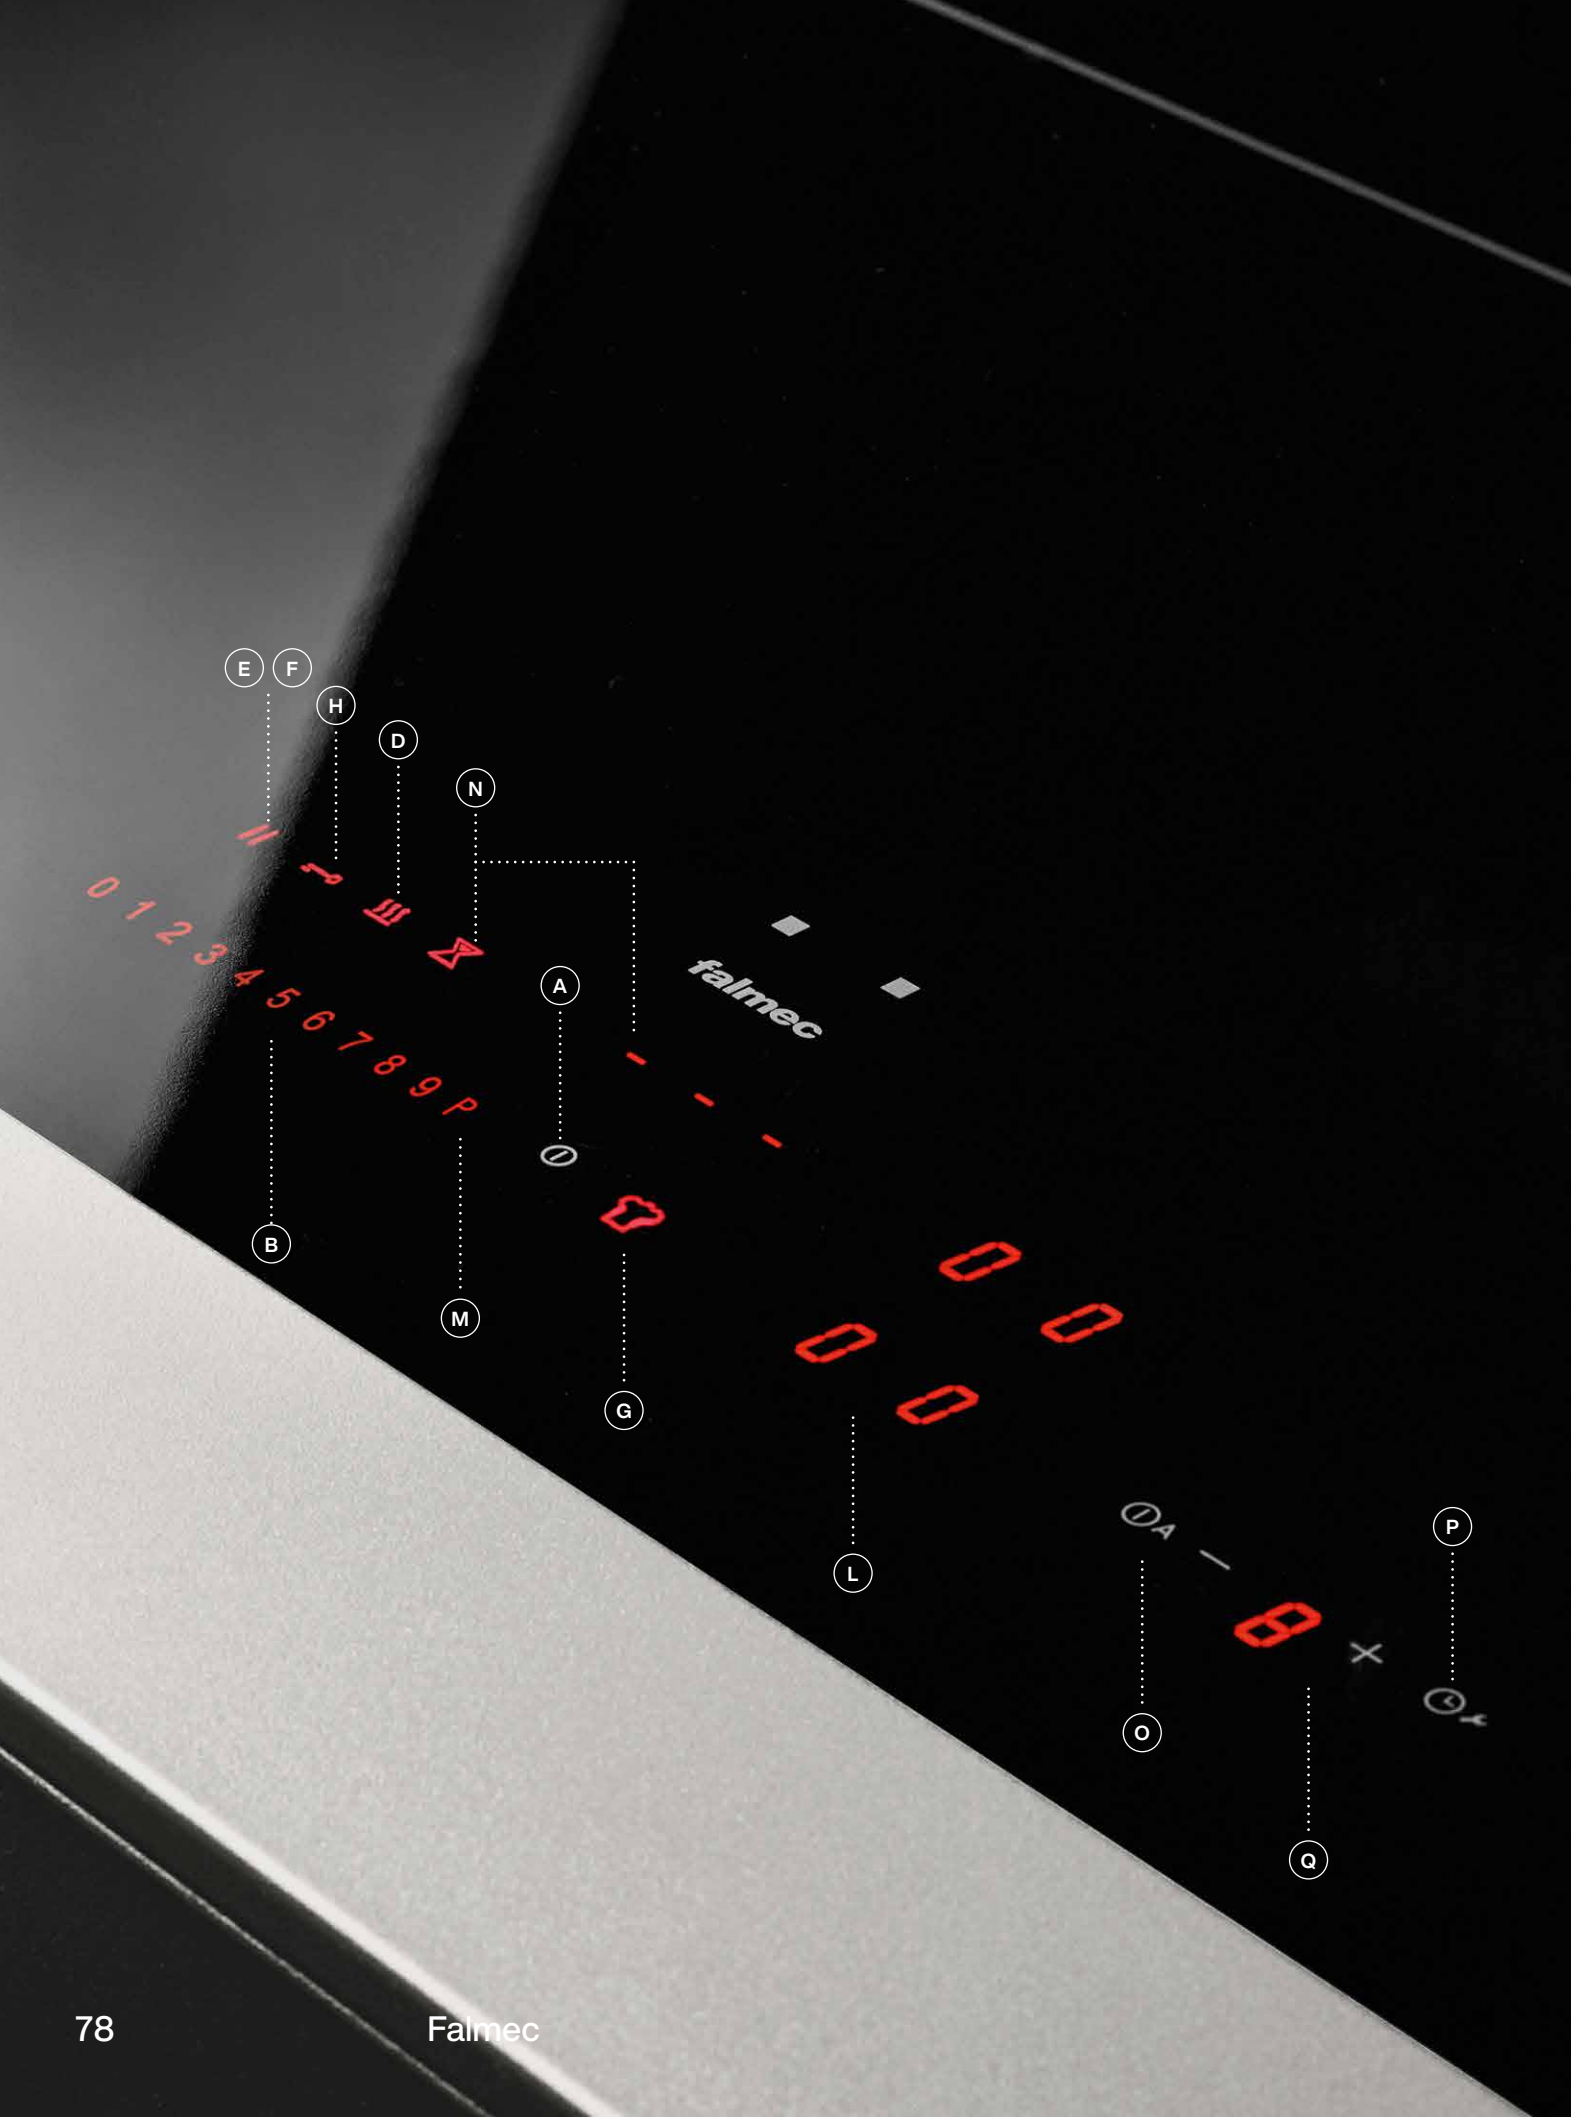

Carbon.Zeo Microtech

Falmec's unique combined Carbon.Zeo Microtech filter uses materials of natural origin, such as zeolite and activated carbon, to trap odours with maximum effectiveness.

Carbon
Activated carbon is a material containing mainly carbon in the form of graphite micro-crystals, which are treated to obtain a porous structure with a large internal surface area. Thanks to these characteristics, they are able to hold many types of substances, attracting their molecules and absorbing them internally.

Zeolite
Zeolite is a mineral with a high capacity to absorb organic compounds and water vapour. This property results directly from the microporosity of its crystalline structure. Furthermore, zeolite, due to its chemical characteristics, releases heat on contact with humidity, reducing it. The use of zeolite is therefore very important both to reduce odours and to absorb water vapour from cooking

Long life
The Carbon.Zeo combination filter has a very long service life: approx. 3 years with normal use of the hood.




Anti-odour filter kit


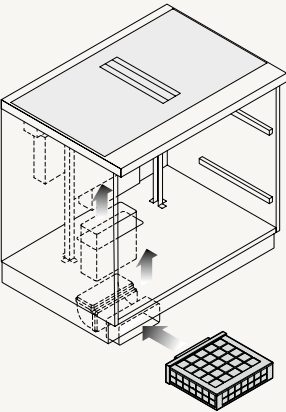

Under base filter unit
Under base filter solutions are equipped with Carbon.Zeo technology and are installed under the kitchen plinth to enhance the filtering capacity of Falmec's solutions.

Under base

Filter unit kit
Under base
KACL.930




Filter spare parts
KACL.931




44853,5

Outlet grid (included in the kit)



38537

Cut-out size grid



32336399


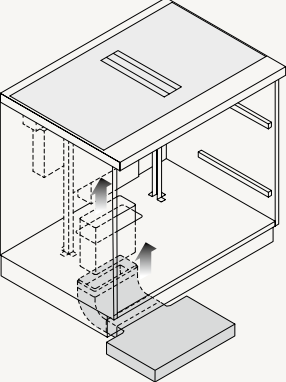

Under base Slim filter unit (h 60 mm)
This solution is designed to achieve the best filtration performance even in kitchens with a plinth lowered in height by up to 6 cm. This solution uses a honeycomb charcoal filtration technology that is renewable allowing a service life of 5 years.

Under base Slim

Filter unit kit
Under base
Slim h 60 mm
KACL.951


Filter spare parts
KACL.952

Aluminium grid
for air outlet
KACL.955




50060

Grid for air outlet



48246R5

Cut-out

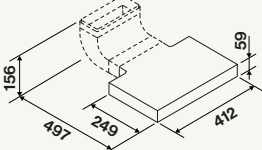

15649724959412








Accessories / spare filters

Brera Silence Kit		Carbon.Zeo filters	
	KACL.1026 (Brera/Brera 75)	Accessories	Spare parts
	It further improves the silence of Brera hob	KACL.1006 (Brera)	KACL.963 (Quantum Pro Easy)
		KACL.1037 (Brera 75)	KACL.965 (Zero Easy)
		KACL.1042 (Level One)	
			
Black frame		Rectangular grill	
	KACL.155#NF (Quantum Pro / Quantum Pro Easy, Zero / Zero Easy)		KACL.1017
	Protective perimeter frame in matt black painted metal		Induction grill made of die-cast aluminium with scratchproof treatment, resistant up to 300°C. Suitable for cooking zones with bridge function. 41x24 cm
Premium cookware for induction			
KACL.1020		KACL.1019	
Cookware set consisting of 8 pieces in various sizes: 3 pots, 2 frying pans, 3 lids. Cast aluminium body. Thick aluminium and heat-radiating steel base. 4-layer granite-effect non-stick interior. Removable handles. Oven proof up to 180°.		Cookware set consisting of 9 pieces of various sizes: 3 pots, 1 pan with 2 handles, 1 saucepan, 4 lids. 18/10 stainless steel body. Steel/aluminium/steel heat-radiating multilayer bottom. Steel lids and handles.	
			

Cooking installation

In order for the product to function optimally, correct installation in the kitchen unit is essential. To facilitate its operation Falmec offers several options with and without ducting.

The hobs with integrated extraction have a series of components included in the package, designed to meet the main installation requirements. For more complex configurations, a range of accessory ducting is also available.

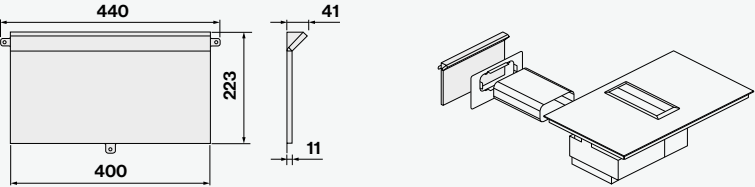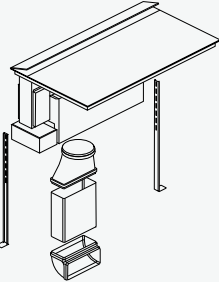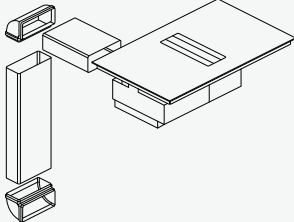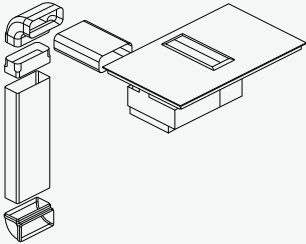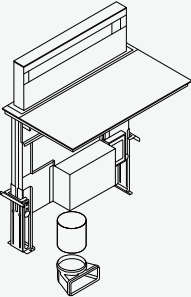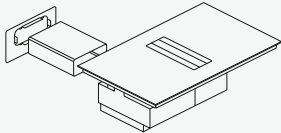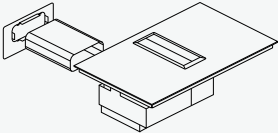Anti-noise conveyer (optional) for Zero Easy and Quantum Pro Easy		
		KACL1036 – 75 € (this item is included in the Quantum Pro model package)
Brera	Zero	Quantum Pro
		
Level One	Zero Easy	Quantum Pro Easy
		

Ducting accessories

Circular / flat bend	Horizontal / flat elbow	Round bend	Vertical / rectangular elbow
KACL.371 ø150/220x90 	KACL.367 220x90 	KACL.391 ø150 	KACL.369 220x90 
Rigid flat pipe	Rigid round pipe	Flat junction	Round junction
KACL.352 220x90x1200 	KACL.358 ø150x1200 	KACL.356 220x90 	KACL.380 ø150 
Circular / flat connector	Flexible ducting belt	Rectangular duct holder	Aluminium pipe extendable to up to 3 m
KACL.376 ø150/220x90 	KACL.364 ø150 	KACL.362 220x90 	KACL.360 ø150 x 800-3000 
Gravity wings grid			
KACL.348 Ø125 / Ø150 			

Falmec S.p.A

via dell'Artigianato, 42 z.i.
31029 Vittorio Veneto
Treviso — Italy
info@falmec.com
falmec.com

Images
Nudesign

Photo and styling
Eye Studio / Beppe Mangia

Graphic Design
Designwork

Texts editing
Daniele Varelli / Dana Cukier

*Post-production photos
and colour separation*
Luce Group

Falmec declines all responsibility for any inaccuracies contained in this catalogue that are due to typos and copying errors.

Falmec Spa hereby reserves the right to make - at any moment and without prior notice - all the technical, aesthetic and functional alterations to the products that it believes necessary for their improvement.

Models, images and technical solutions presented in this catalogue are protected by industrial property rights.

The printing process does not always permit a faithful reproduction of original tones and materials.

This catalogue is the exclusive property of Falmec Spa. All rights are reserved. Any form of total or partial reproduction of this catalogue is strictly forbidden.

